

Roto Gravure Printing Machine


Laminating Machine

Coating Machine

Slitting Machine

Rewinding Machine

S.A. **CO-MTC**

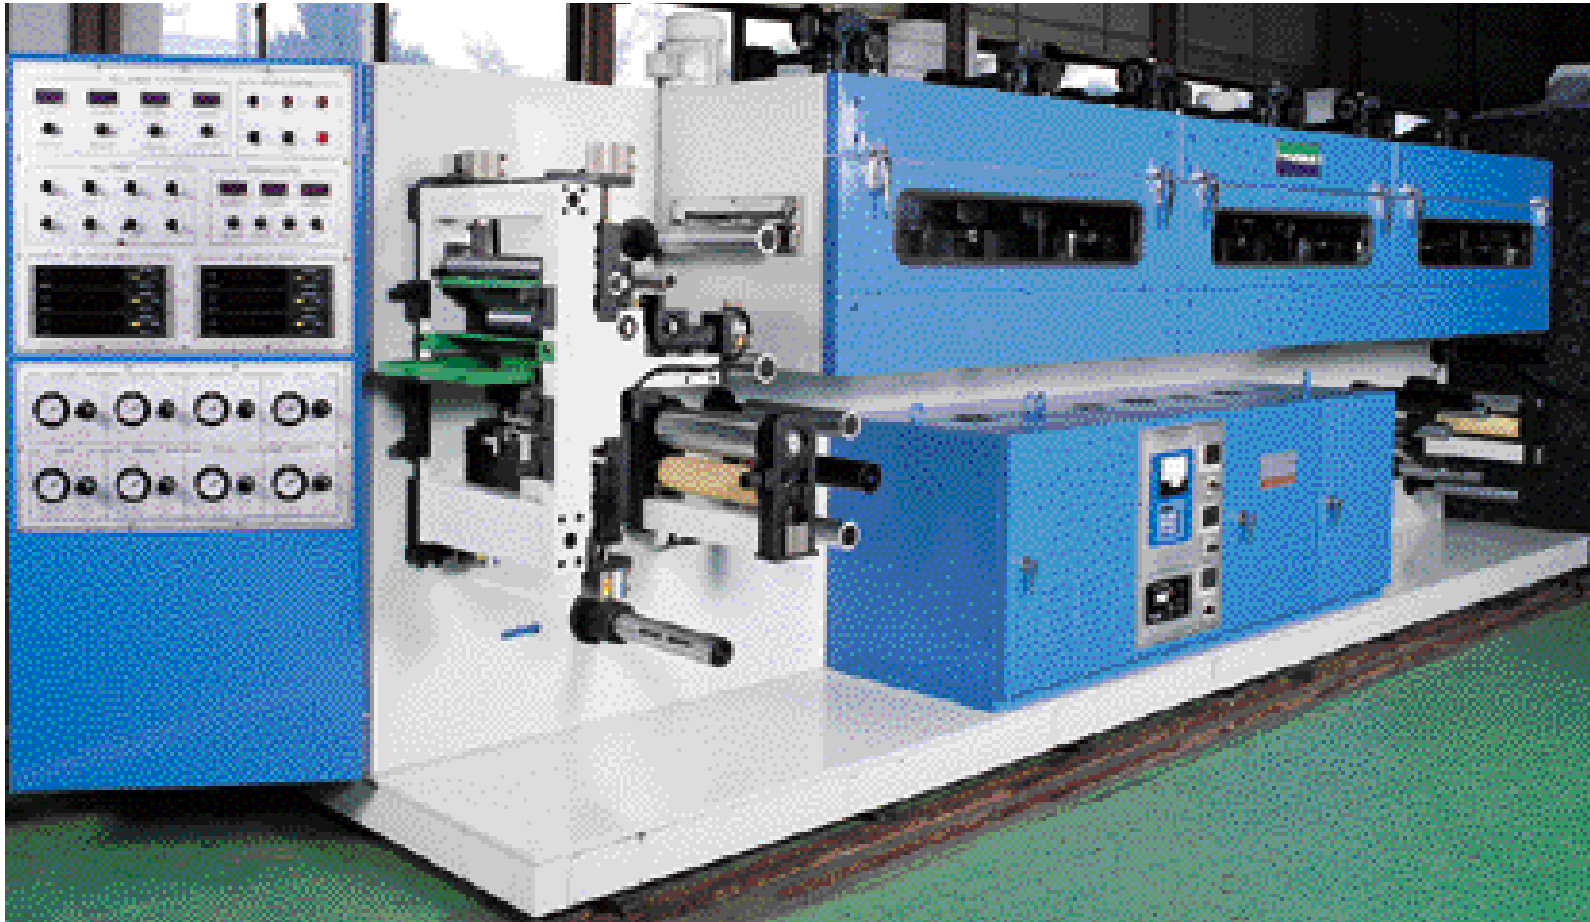

SAM coats what you are dreaming



COATING APPLICATIONS (CONVERTIBLE)

Coating Head								
Coating Weight(Mic/Wet)	3~30	1~15	10~100	2~100	5~300	5~300	20(more)	20(more)
Tape of Coating	Direct Gravure	Off-Set Gravure	Kiss Coat	Kiss Mayer Bar	Reverse Bottom Feed	Reverse Top Feed	"S" Knife Direct	"S" Knife Reverse
Viscosity	Low Viscosity(Under 1,000cps)						High Viscosity (1,000~300,000cps)	

SPECIFICATIONS

Kind of Materials	All Kinds of Plastic Films, Paper, Fabrics	
Web Width	Max. 350mm	
Machine Speed	Max. 50m/min	
Unwinder (First, Second)	Max. 350mm	
Coating	Head	Convertible to 10 kinds of Coating Applications (See the above)
	Viscosity	Max. up to 300,000 cps
	Thickness	Digital Indication with Magnetic Scale
Dryer	Type	Air Floating or Roll Supported Nozzle Type Available
	Length	1.5m / Zone x 3 Zone = 4.5m
	Heat Source	Electric, Steam, Thermo Hot Oil or Gas is available
Laminating System	Two Roll Press Type	
Rewinder	Max. 350mm	
Drive and Control	D.C or A.C Vector Motor	

