

Roto Gravure Printing Machine


Laminating Machine

Coating Machine

Slitting Machine

Rewinding Machine

S.A. **ELX 1300**

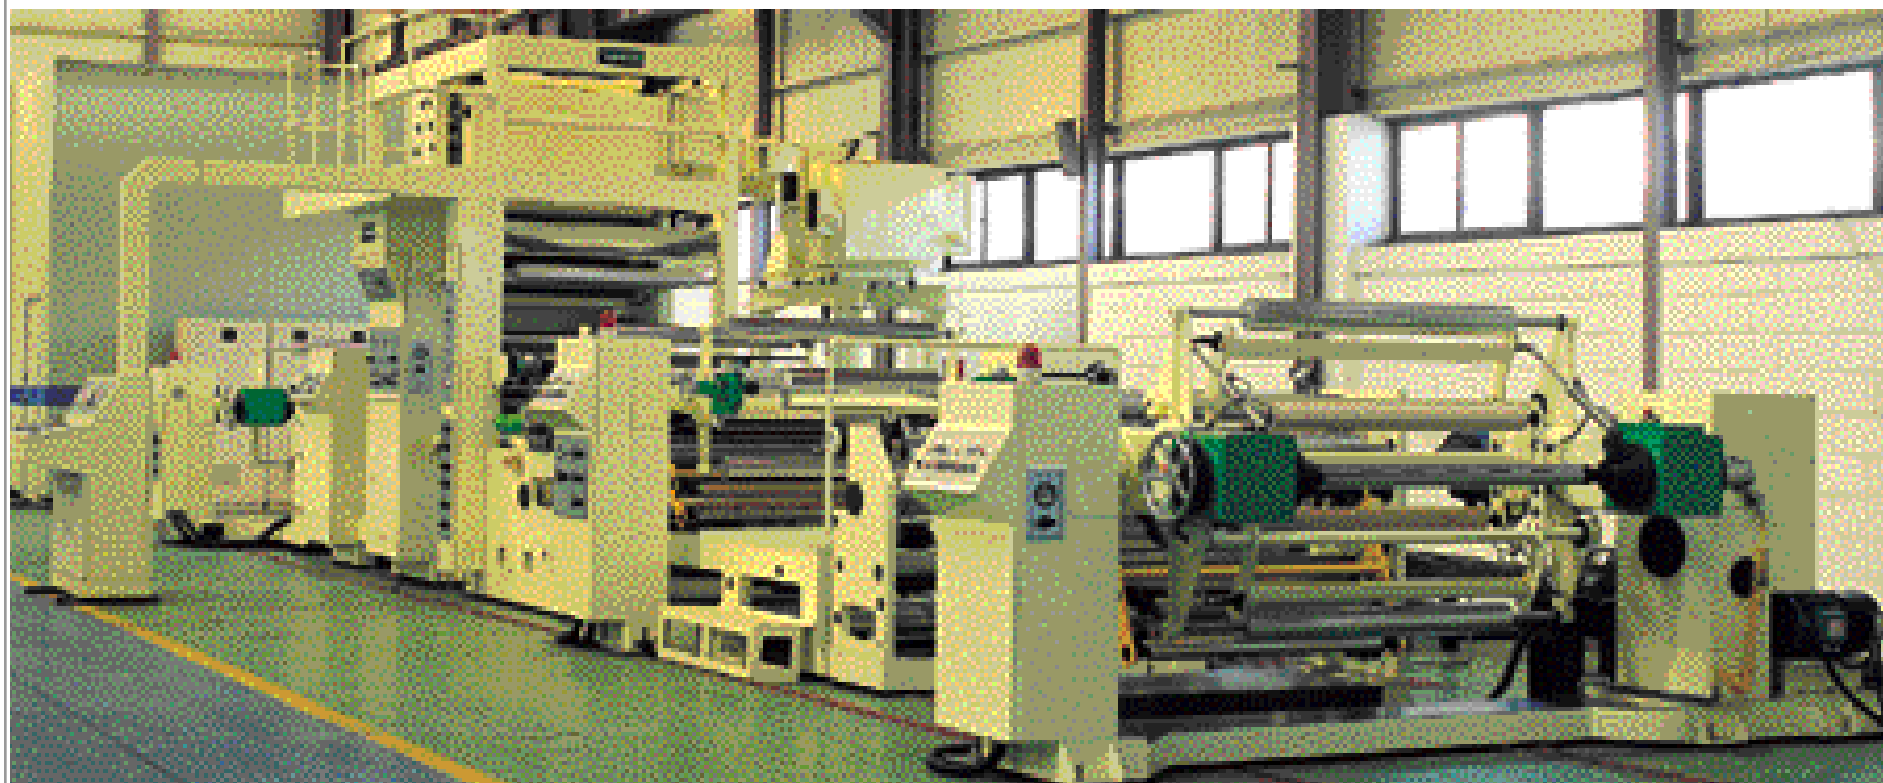

*SAM laminates what you are thinking*



## SPECIFICATIONS

DESCRIPTION	STANDARD		NONSTANDARD
<b>Basic Specification</b>	Kind of Web	OPP, CPP, PET, Nylon, Al-Foil, Paper, Etc.	
	Web Width	Max. 1200mm	1500mm
	Operating Speed	Max. 200m/min	Max. 250m/min
	Coating Thickness	15~50 μ	
	Resin	LDPE, PP, LLDPE, EAA, IONOMER, EVA, ETC.	
<b>Extruder</b>	Drive Motor	A.C Vector Motor	
	Output	250kg/hr	Max. 250kg/hr(LDPE)
<b>T-Die</b>	Lip Length	1350mm	Automatic Die
<b>Unwinder</b>	Type	2 Shafts Turret Type	
	Reel Dia	800mm	1000mm
<b>Infeeding Unit</b>	Synchronized Control Type with A.C Vector Motor		
<b>Anchor Coating Unit</b>	Coating System	Gravure Roller Coating System	Chamber Doctor
	Impression Rubber Roller	Driving Type	
	Drying System	Heat Exchanging Type with Steam, Electric Heater, Thermal oil or Gas	
<b>Laminating Unit</b>	Chilled Roll Diameter	600mm	750mm
<b>Sandwich Unwinder</b>	Reel Dia	Max. 600mm	800mm
<b>Rewinder</b>	Type	2 Shafts Turret Type	
	Reel Dia	Max. 800mm	1000mm
<b>Tension Control</b>	Automatic Web Tension Control by A.C Vector Motor		

